


SLR2000 Enhanced Event Timer

Photo and Key Specifications

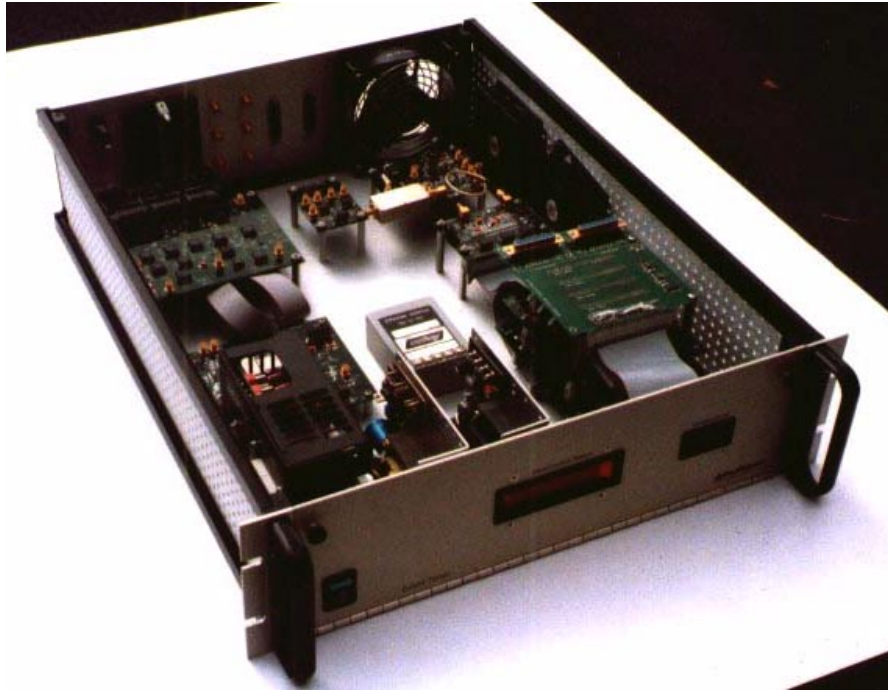

- RMS Jitter <5 ps (calibrated)
- Max Event Rate 10 MHz Burst with duration limited by computer
- Internal Data Buffer: 500 events
- Quad Input with Digital ID of input port
- Internal Coarse Clock 500 MHz
- 12-bit A/D sampling over 2 ns period